



SL150 Panel

Description

SL150 is an integral snap-lock standing seam roofing panel used on commercial and residential applications. The snap lock mechanism allows for rapid installation without the need for seaming tools. The panel is attached to a solid substrate with hidden clips which allow for unlimited thermal expansion.

Application

Product can be applied to various solid substrate applications such as wood sheathing, wood planking, metal decking, and rigid insulation applied over metal decking. Minimum recommended slope is 3:12.

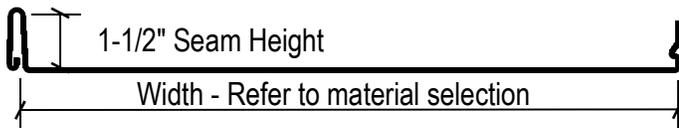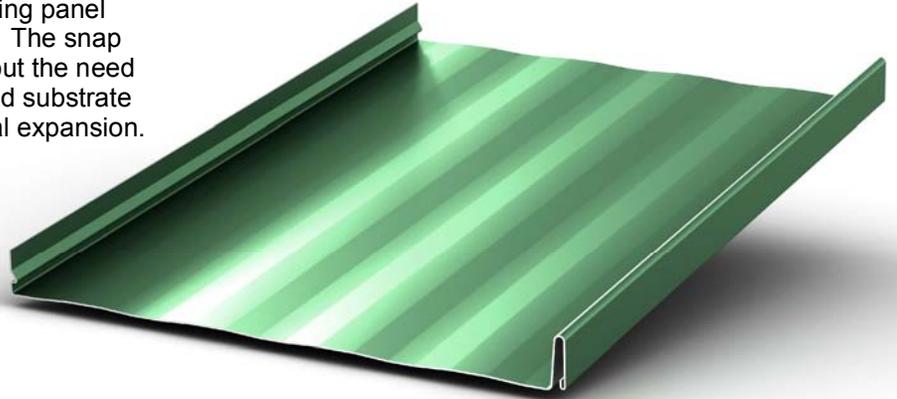

Material


- 26 gauge AZ-50 Galvalume® steel
- 24 gauge AZ-50 Galvalume® steel
- 22 gauge AZ-50 Galvalume® steel (min. quantities apply)
- 0.032" Aluminum

Widths


- 16" (standard), 11-5/8", and 18"
- Custom widths available. Please inquire.

Finishes

- Bare Galvalume® (with protective clear acrylic coating)
- PVDF Fluoropolymer (Kynar 500®) finish for 24 gauge, 22 gauge and 0.032" aluminum
- SMP (Polyester) finish for 26 gauge

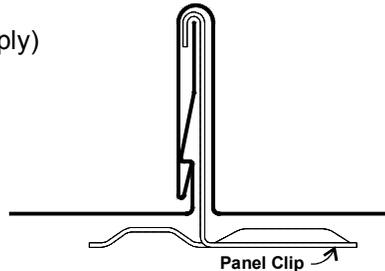

Seam Profile

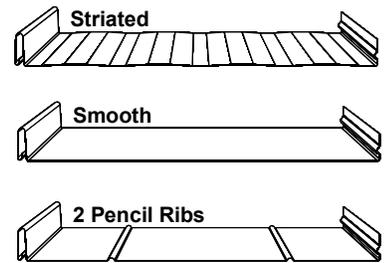

Optional Surface Patterns

Profile Choices

- Striated (standard), smooth, and 2 pencil ribs

Testing

- UL90 uplift resistance classified assemblies
- UL790 fire, class A rating
- UL2218 impact resistance, class 4
- ASTM E-283 air infiltration tested
- ASTM E-331 water infiltration tested
- Florida Product Approvals: FL#9443.1 and FL#18716.2

Warranties

- 25 Year Galvalume® Substrate Warranty
- 30 Year PVDF (Kynar 500®) Warranty
- 40 Year SMP (Polyester) Warranty
- Weathertightness Warranties available



Oil canning: Union Corrugating Company purchases prime commercial grade light gauge metal which is manufactured to all industry accepted tolerances. "Oil canning" is an inherent part of light gauge cold formed panels and is not cause for rejection.